

LED Commercial ceiling/wall luminaire



Replacement for

28- 38W 2D CFL


Features

- 22W
- >1200lm
- Anti-vandal design
- Polycarbonate cover and anti-tamper screws
- IP65 Rating.


Commercial applications

With a polycarbonate diffuser offering an even and very high quality light distribution, this commercial ceiling or wall light is ideal for a variety of communal areas, from stairwells and corridors to entrance halls.

Photometric performance

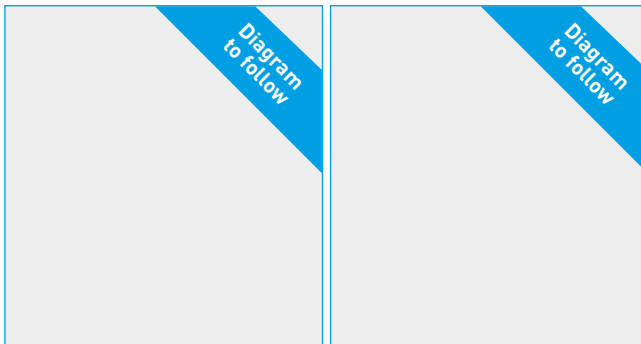

Dimensions (mm)

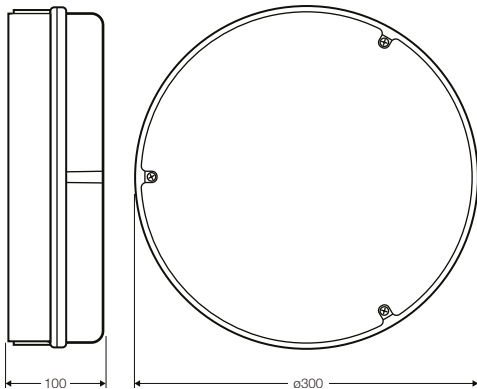

Order codes

EL22CCL – 22W Ceiling Light 4500K IP65

EL22CCLMW – 22W Ceiling Light 4500K IP65
Microwave on/off

EL22CCLECK – 22W Ceiling Light 4500K IP65
with Emergency

EL22CCLMWECK- 22W Ceiling Light 4500K IP65
Microwave on/off with Emergency

Installation information

Please contact the team at Novah for full installation advice.

Technical specifications

LED COMMERCIAL CEILING/WALL LUMINAIRE												Emergency	Microwave
Product codes	Product name	Dimensions	Wattage	Weight	Light output	Colour temp.	CRI	Rated lifetime	Beam angle	Working environment	Recommended replacement for		
EL22CCL	18W Orbit Commercial light	300 x 265 x 180mm	18W	>1.5KG	>1200lm	5000K	>80	30,000 hrs	120°	-20° → 40°C	28-38W 2D CFL	○	○
EL22CCLMW	18W Orbit Commercial light with microwave on/off	300 x 265 x 180mm	18W	>1.5KG	>1200lm	5000K	>80	30,000 hrs	120°	-20° → 40°C	28-38W 2D CFL	○	●
EL22CCLECK	18W Orbit Commercial light with emergency	300 x 265 x 180mm	18W	>1.5KG	>1200lm	5000K	>80	30,000 hrs	120°	-20° → 40°C	28-38W 2D CFL	●	○
EL22CCLMWECK	18W Orbit Commercial light with microwave on/off with emergency	300 x 265 x 180mm	18W	>1.5KG	>1200lm	5000K	>80	30,000 hrs	120°	-20° → 40°C	28-38W 2D CFL	●	●